

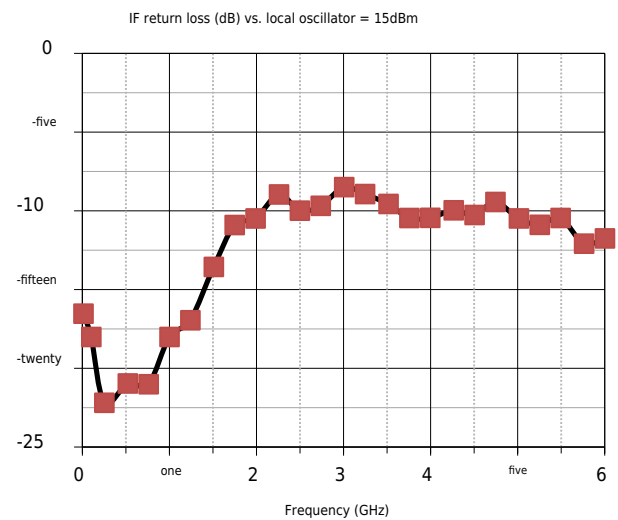
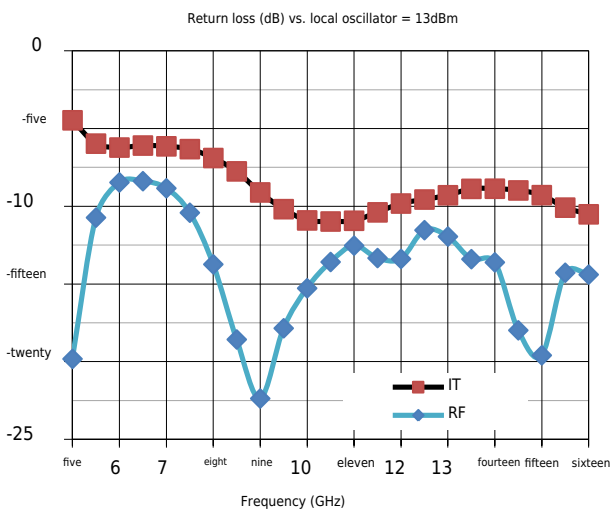
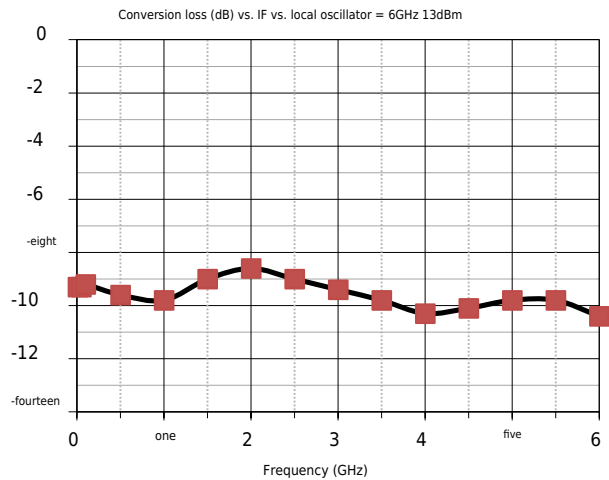
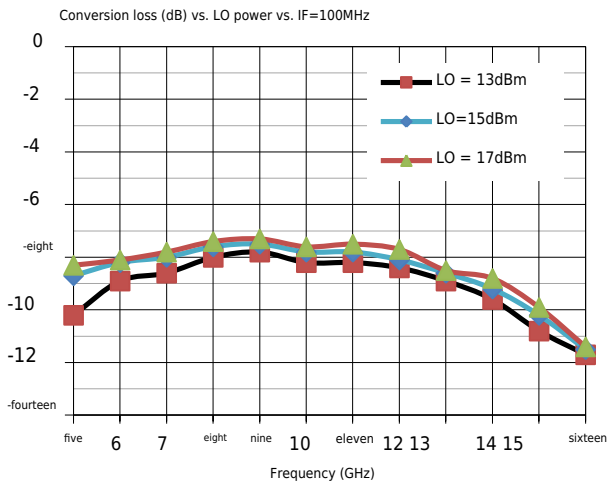
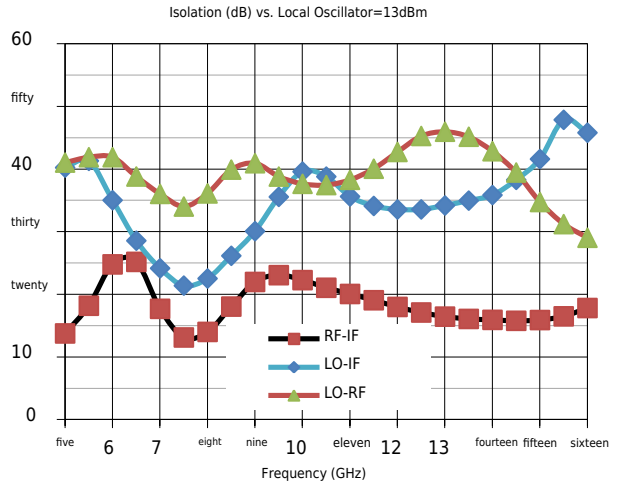


GaAs monolithic integrated passive double balanced mixer
5.0~16.0GHz


Typical test curve

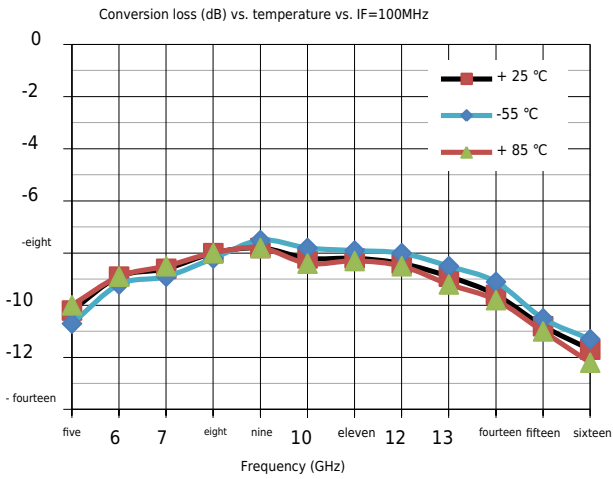


GaAs monolithic integrated passive double balanced mixer
5.0~16.0GHz

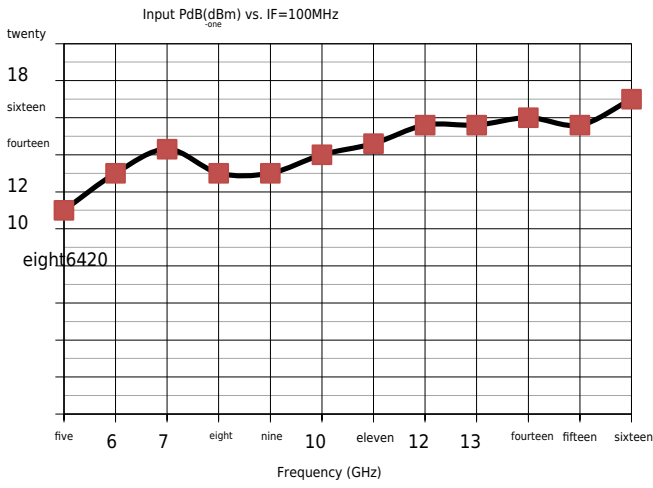

Shape and port size (mm)

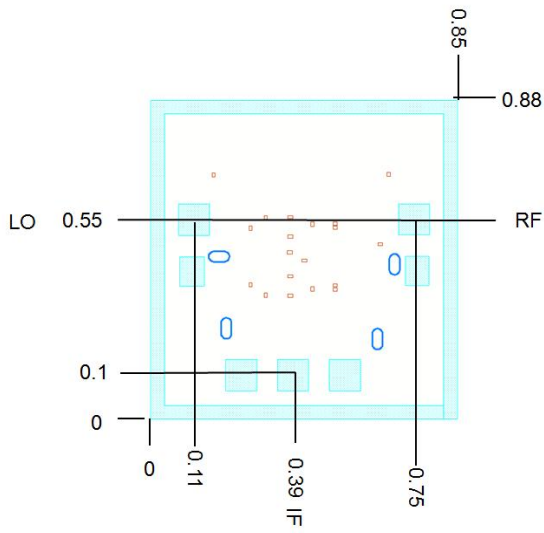

Recommended assembly drawing

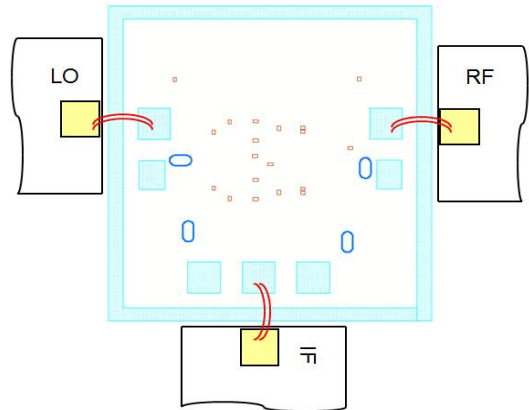

Precautions

Gallium arsenide MMIC devices are susceptible to damage from electrostatic discharge. Precautions should be taken during transportation, assembly and testing.