

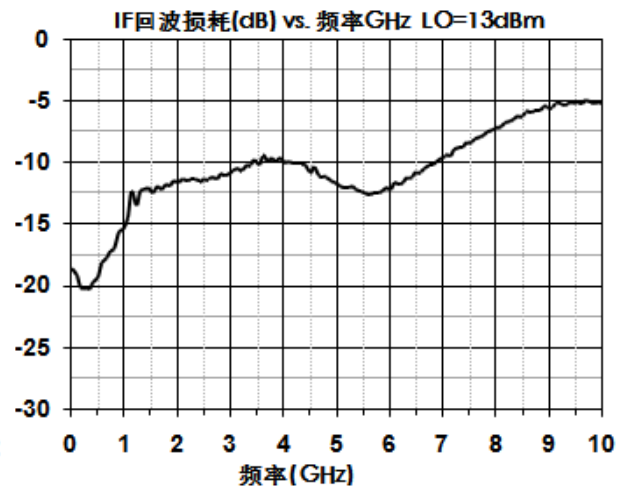
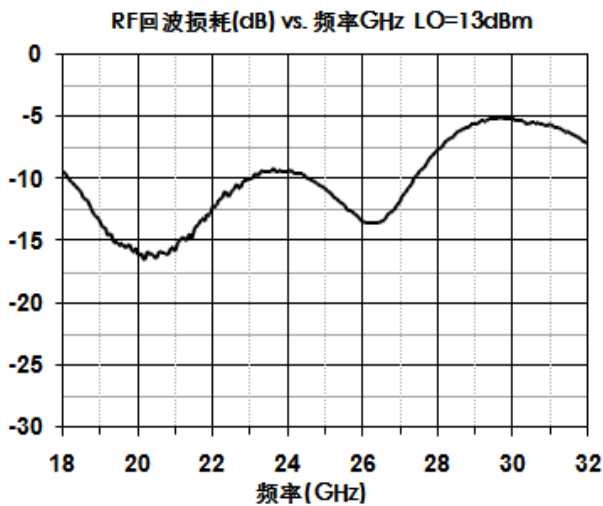
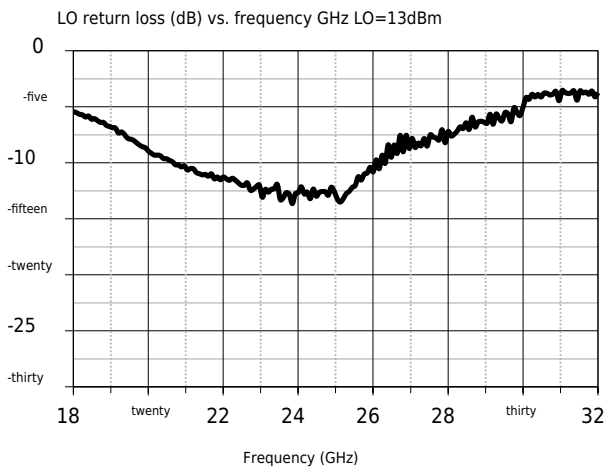
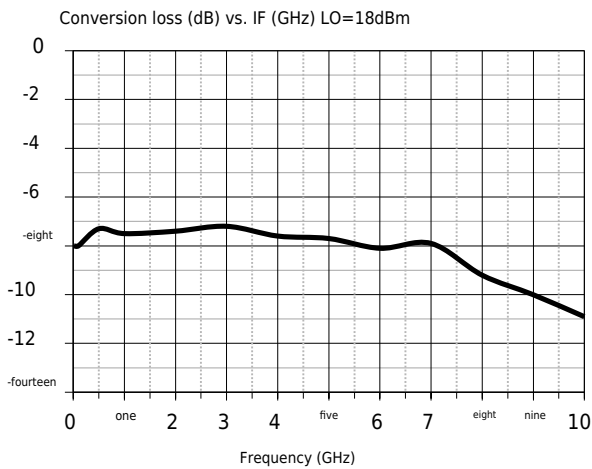


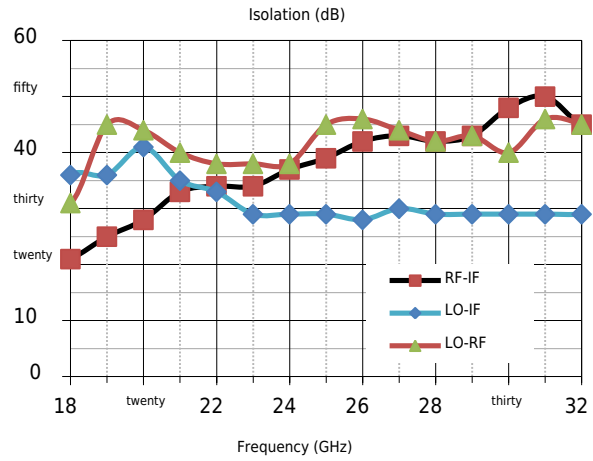

GaAs monolithic integrated double balanced mixer


18~32GHz

Typical test curve

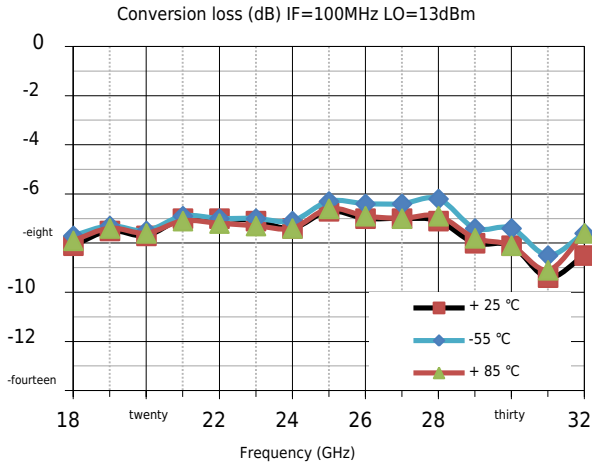


GaAs monolithic integrated double balanced mixer


18~32GHz

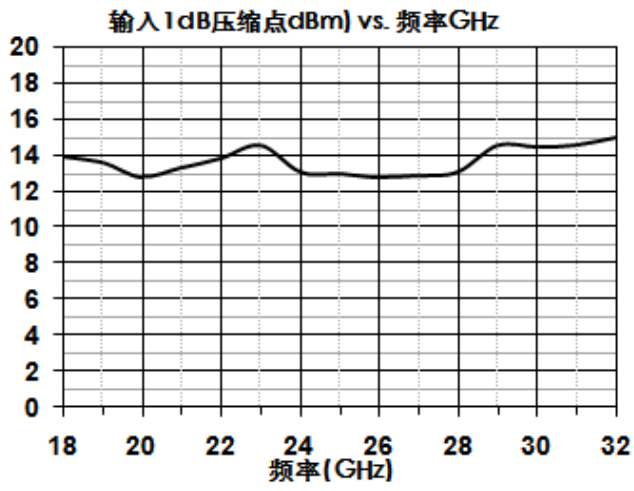

Shape and port size  
(In mm)

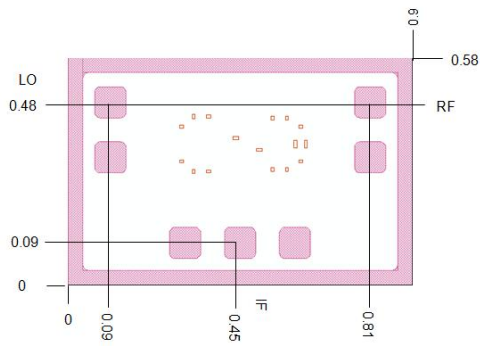

Recommended assembly drawing

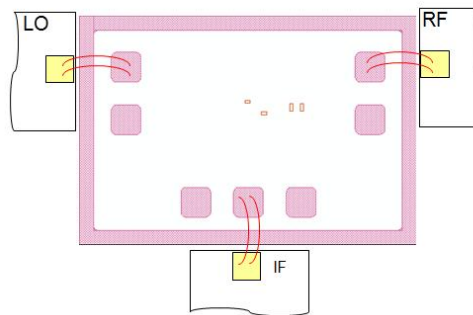

Precautions

Gallium arsenide MMIC devices are susceptible to damage from electrostatic discharge. Precautions should be taken during transportation, assembly and testing.